


Śruby z łbem walcowym z gniazdem sześciokątnym

Zylinderschrauben mit Innensechskant
 Hexagon socket head cap screws

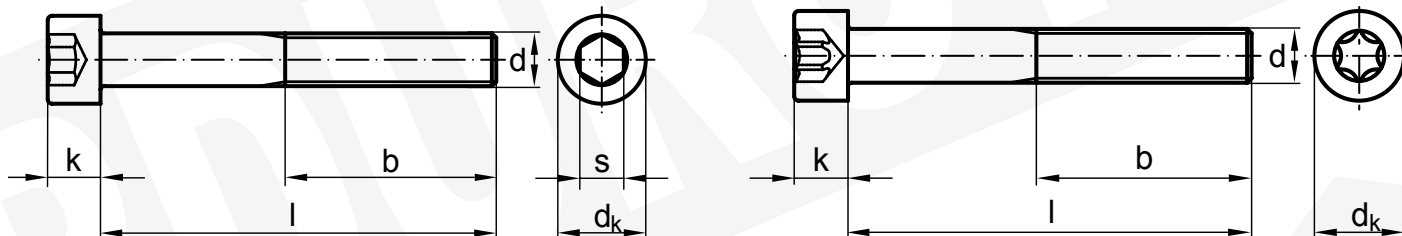

d	M1,4	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
dk	2,6	3	3,8	4,5	5,5	7	8,5	10	13	16	18	21	24	27
k	1,4	1,6	2	2,5	3	4	5	6	8	10	12	14	16	18
s	1,3	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
T	-	-	T6	T8	T10	T20	T25	T30	T45	T50	T55	T60	T70	T80
b ¹⁾	14	15	16	17	18	20	22	24	28	32	36	40	44	48

d	M20	M22	M24	M27	M30	M33	M36	M39	M42	M45	M52	M56	M64	M72
dk	30	33	36	40	45	50	54	58	63	68	78	84	96	108
k	20	22	24	27	30	33	36	39	42	45	52	56	64	72
s	17	17	19	19	22	24	27	27	32	36	36	41	46	55
T	T90	-	-	-	-	-	-	-	-	-	-	-	-	-
b ¹⁾	52	56	60	66	72	78	84	90	96	102	116	124	140	156

¹⁾ dla normy ISO 4762